


PAD A (N.T.S.) - 4NO

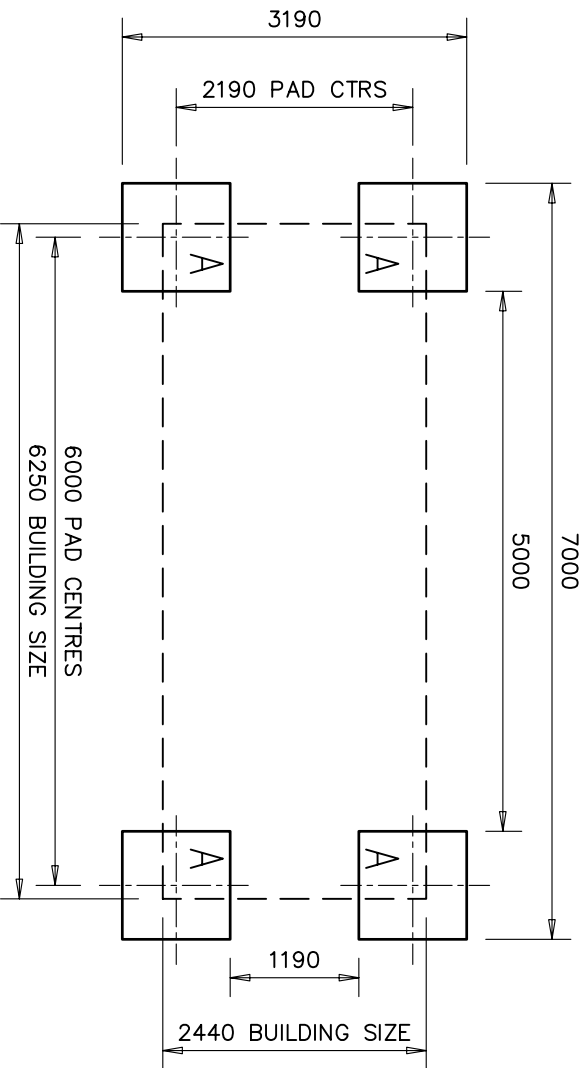

NOTES

- 1/ FOUNDATION DESIGN IS FOR A LEVEL SITE WITH A GROUND BEARING CAPACITY OF 110 KN/M SQ. AND A BUILDING FLOOR LOADING OF 3 KN/M SQ.
- 2/ DEPTH OF FOUNDATIONS IS DEPENDENT ON LEVEL OF GROUND BEARING STRATA ON SITE OR AS REQUIRED BY LOCAL AUTHORITY.
A MINIMUM DEPTH OF 500mm IS REQUIRED TO JUSTIFY THE LOAD PRESSURE.

The details contained in this document are for indicative purposes only and the final specification and layout should be confirmed at time of order.
All information is subject to change without notice in line with the Company's policy of continuous product development and improvement.
This document must not be copied, reproduced, or distributed in any way without the express written permission of Alsim System Building Limited.

portablespace			
Product Code			
Project			
20' X 8' STEEL UNITS			
Title			
FOUNDATION DETAIL - DOUBLE STACKED			
Date	Scale	Drawn By	
14/01/04	1 : 70	CLB	
Drawing No.	Rev.		